

FDR SeriesMEMBER OF

MORRIS GROUP
INTERNATIONAL

"Not Available In The U.S."

Floor Door Recessed

Floor Door Recessed are ideally suited for new installations or for remodeling interior and exterior applications that require an access opening while blending with exterior surrounding floor material and water tightness is not a concern. Door includes a stainless steel slam latch and 316 stainless steel hold-open arm with red vinyl grip with automatic lock at the open position.

Door is fabricated 1/4" plate with a 1/8" recess and reinforced for 150 psf live load.

Angle Frame is fabricated from aluminum extrusion with a 1" integral anchoring flange.

Stainless steel hinges with tamper resistant stainless steel bolts and nuts.

Latch is a stainless steel slamlock with plug and removable key and a fixed inside handle.

Finish to be a mill finish with bituminous coating on exterior of frame.

Guide Specification

Provide Elmdor® FDR Series, Floor Doors (Specify model number and options.) Floor door shall be fabricated from 1/4" thick aluminum with a 1/8" recess and reinforced for 150 psf live load. The door shall have stainless steel torsion bars and with tamper resistant stainless steel bolts and nuts. Latch is a stainless steel slamlock with plug and removable key. Finish shall be a mill finish, with bituminous coating on exterior of frame.

Member of U.S. Green
Building Council

Page 1 of 3

FDR

New: 08/03/15

Recyclable
Product

MODEL NUMBER AND OPTIONS SELECTION
BASE MODEL NUMBER
☐ FDR 1/8" Recessed Floor Door


Suffix Options

- ☐ -AF Anodized Finish
☐ -CL Cylinder Lock
☐ -SRS Slip Resistant Surface
 (Bonded to Cover Plate)

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE	FRAME OPENING		CLEAR OPENING		OVERALL SIZE		WEIGHT
in. (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	Lbs. (KG)
24" x 24" (610 x 610)	26-1/8" (664)	22-3/4" (578)	24" (610)	24" (610)	31-1/8" (791)	28-3/4" (730)	45 (20)
24" x 30" (610 x 762)	26-1/8" (664)	28-3/4" (730)	24" (610)	30" (762)	31-1/8" (791)	34-3/4" (883)	50 (23)
24" x 36" (610 x 914)	26-1/8" (664)	34-3/4" (883)	24" (610)	36" (914)	31-1/8" (791)	40-3/4" (1035)	60 (27)
30" x 30" (762 x 762)	32-1/8" (816)	28-3/4" (730)	30" (762)	30" (762)	37-1/8" (943)	34-3/4" (883)	60 (27)
30" x 36" (762 x 914)	32-1/8" (816)	34-3/4" (883)	30" (762)	36" (914)	37-1/8" (943)	40-3/4" (1035)	70 (32)
30" x 48" (762 x 1219)	32-1/8" (816)	46-3/4" (1187)	30" (762)	48" (1219)	37-1/8" (943)	52-3/4" (1340)	85 (39)
36" x 36" (914 x 914)	38-1/8" (968)	34-3/4" (883)	36" (914)	36" (914)	43-1/8" (1095)	40-3/4" (1035)	75 (34)
36" x 48" (914 x 1219)	38-1/8" (968)	46-3/4" (1187)	36" (914)	48" (1219)	43-1/8" (1095)	52-3/4" (1340)	95 (43)
42" x 42" (1067 x 1067)	44-1/8" (1121)	40-3/4" (1035)	42" (1067)	42" (1067)	49-1/8" (1248)	46-3/4" (1187)	95 (43)

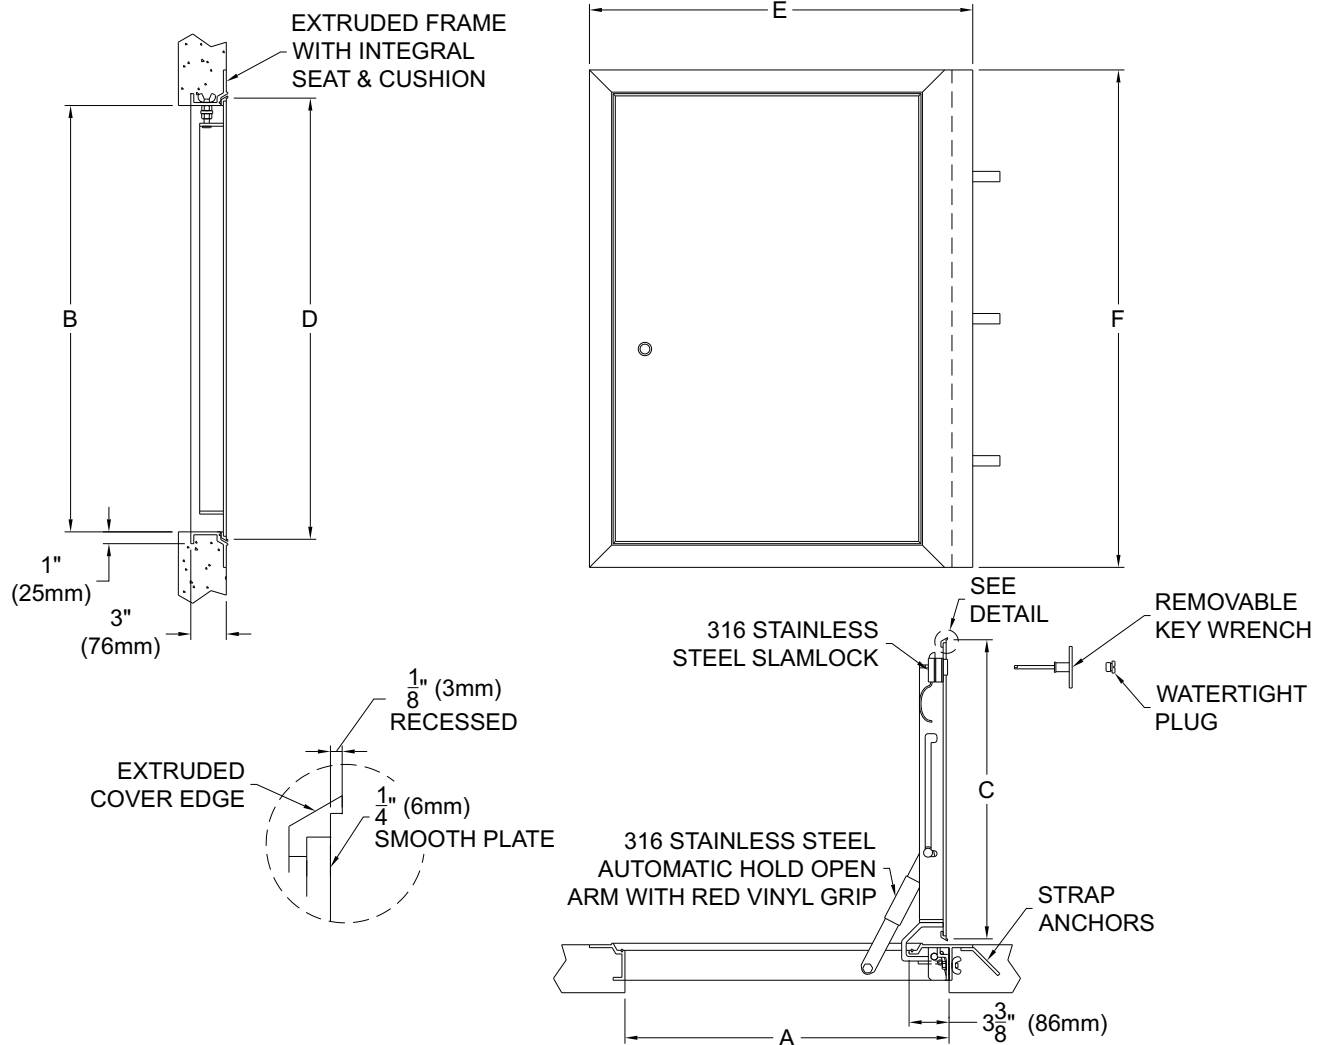

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.


SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

STANDARD AVAILABLE SIZES
 Special sizes available upon request.

NOTE: Doors 48" and above are supplied with two (2) doors (double leaf).

NOMINAL DOOR SIZE	FRAME OPENING		CLEAR OPENING		OVERALL SIZE		WEIGHT
in. (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	Lbs. (KG)
48" x 48" (1219 x 1219)	50-1/8" (1270)	46-3/4" (1168)	48" (1220)	48" (1220)	55-1/8" (1897)	52-3/4" (1320)	155 (71)
48" x 72" (1219 x 1829)	50-1/8" (1270)	70-3/4" (1778)	48" (1220)	72" (1829)	55-1/8" (1897)	76-3/4" (1930)	220 (100)
60" x 60" (1524 x 1524)	62-1/8" (1574)	58-3/4" (1473)	60" (1524)	60" (1524)	67-1/8" (1702)	64-3/4" (1651)	225 (102)

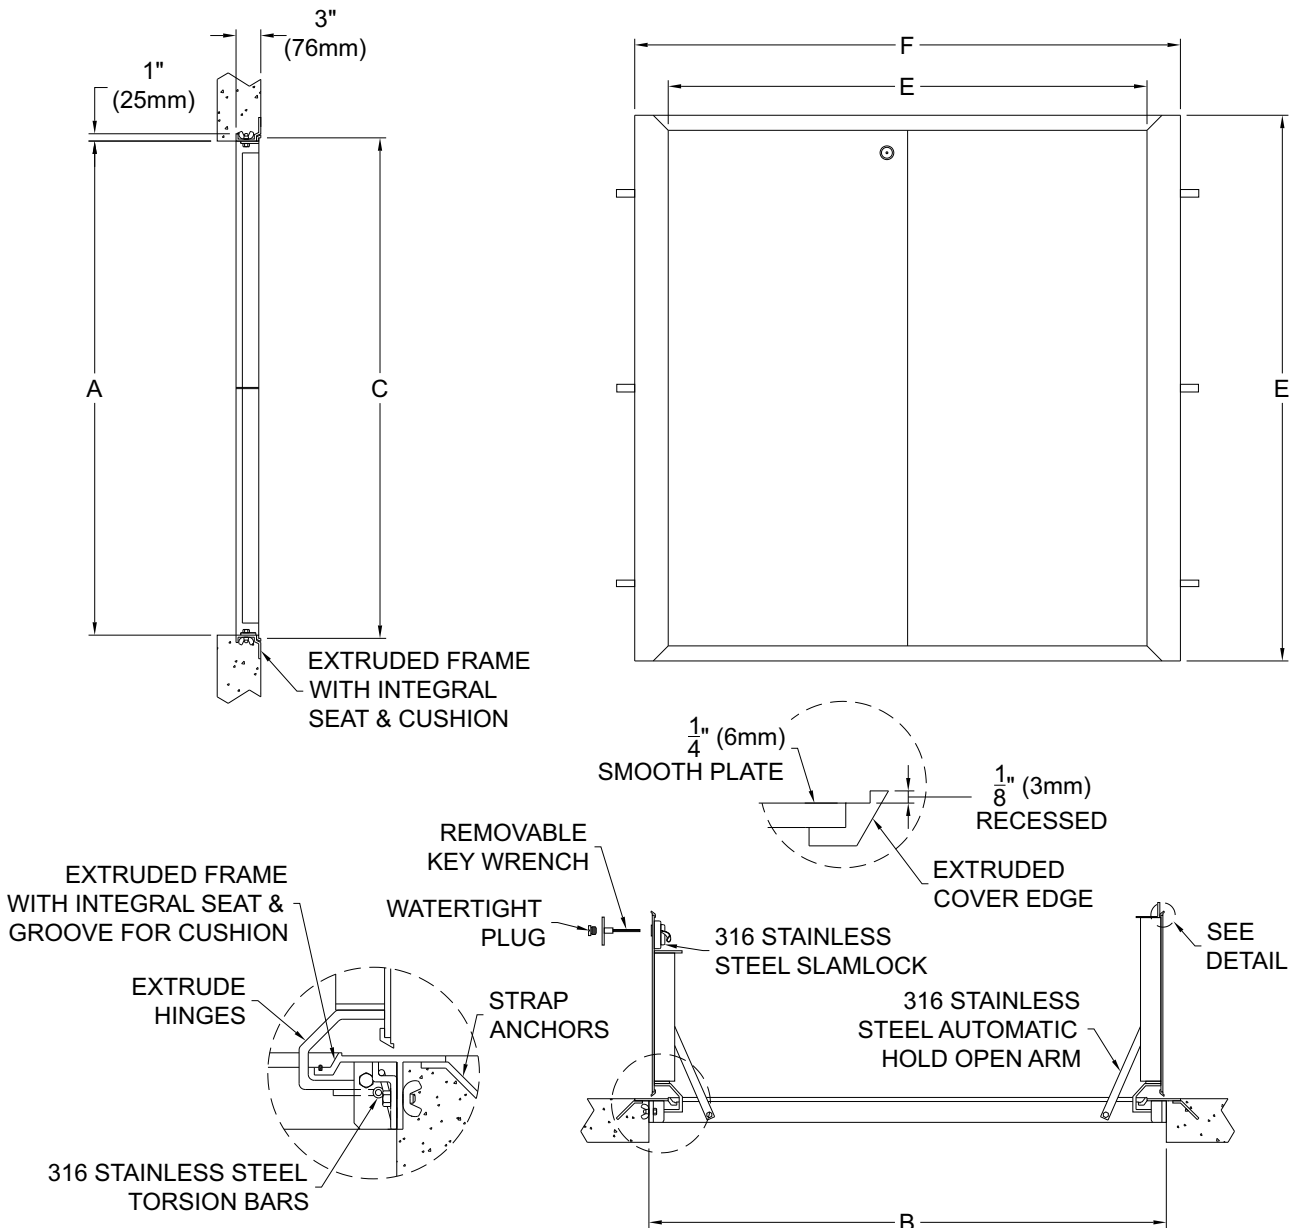

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____