

FDC SeriesMEMBER OF

MORRIS GROUP
INTERNATIONAL

"Not Available In The U.S."

Floor Doors Channel Frame

Floor Doors Channel Frame are ideally suited for new installations or for remodeling interior and exterior applications where water tightness is required.

Door is fabricated 1/4" aluminum diamond plate reinforced for live load of 300 psf.

Frame 1/4" extruded aluminum through frame with 1-1/2" threaded drain coupling and door reducing gasket. Also include 1" anchor flange on all four sides.

Stainless steel hinges 316 stainless steel with tamper resistant stainless steel bolts and nuts.

Opening Device is automatic hold-open arm with red vinyl grip and allows door panel to open to 90 degrees, locking door in open position and allowing for easy control when closing door panel. When required, stainless steel compression springs can be provided to add lift assistance.

Latch is flush aluminum drop handle with staple for padlock. Also available recessed padlock provision: stainless steel slamlock.

Finish to be a mill finish, with optional bituminous coating on exterior of frame.

Guide Specification

Provide Elmdor® FDC Series, Floor Doors (Specify model number and options.) Floor door shall be fabricated from 1/4" aluminum diamond plate reinforced for live load of 300 psf. The door shall have a stainless steel butt hinges with tamper resistant stainless steel bolts and nuts. Latch is a flush aluminum drop handle with staple for padlock with recessed padlock provisions optionally available. Finish shall be a mill finish with optional bituminous coating on exterior of frame.

Member of U.S. Green
Building Council

Page 1 of 3

FDC

New: 08/03/15

Recyclable
Product

MODEL NUMBER AND OPTIONS SELECTION
BASE MODEL NUMBER
☐ FDC Floor Door


Suffix Options

- ☐ -AF Anodized Finish
- ☐ -BPC Bituminous Coating
- ☐ -INS Insulation Under Cover
- ☐ -SRS Slip Resistant Surface (Bonded to Cover Plate)

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE	FRAME OPENING		CLEAR OPENING		OVERALL SIZE		WEIGHT
in. (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	Lbs. (KG)
24" x 24" (610 x 610)	24" (610)	24" (610)	24" (610)	24" (610)	32" (813)	32" (813)	60 (27)
24" x 30" (610 x 762)	24" (610)	30" (762)	24" (610)	30" (762)	32" (813)	38" (965)	69 (31)
24" x 36" (610 x 914)	24" (610)	36" (914)	24" (610)	36" (914)	32" (813)	44" (1118)	77 (35)
30" x 30" (762 x 762)	30" (762)	30" (762)	29" (737)	30" (762)	38" (965)	38" (965)	79 (36)
30" x 36" (762 x 914)	30" (762)	36" (914)	29" (737)	36" (914)	38" (965)	44" (1118)	88 (40)
30" x 48" (762 x 1219)	30" (762)	48" (1219)	29" (737)	48" (1219)	38" (965)	56" (1422)	108 (49)
36" x 36" (914 x 914)	36" (914)	36" (914)	35" (889)	36" (914)	44" (1118)	44" (1118)	99 (45)
36" x 48" (914 x 1219)	36" (914)	48" (1219)	35" (889)	48" (1219)	44" (1118)	56" (1422)	121 (55)
42" x 42" (1067 x 1067)	42" (1067)	42" (1067)	41" (1041)	42" (1067)	50" (1270)	50" (1270)	123 (56)

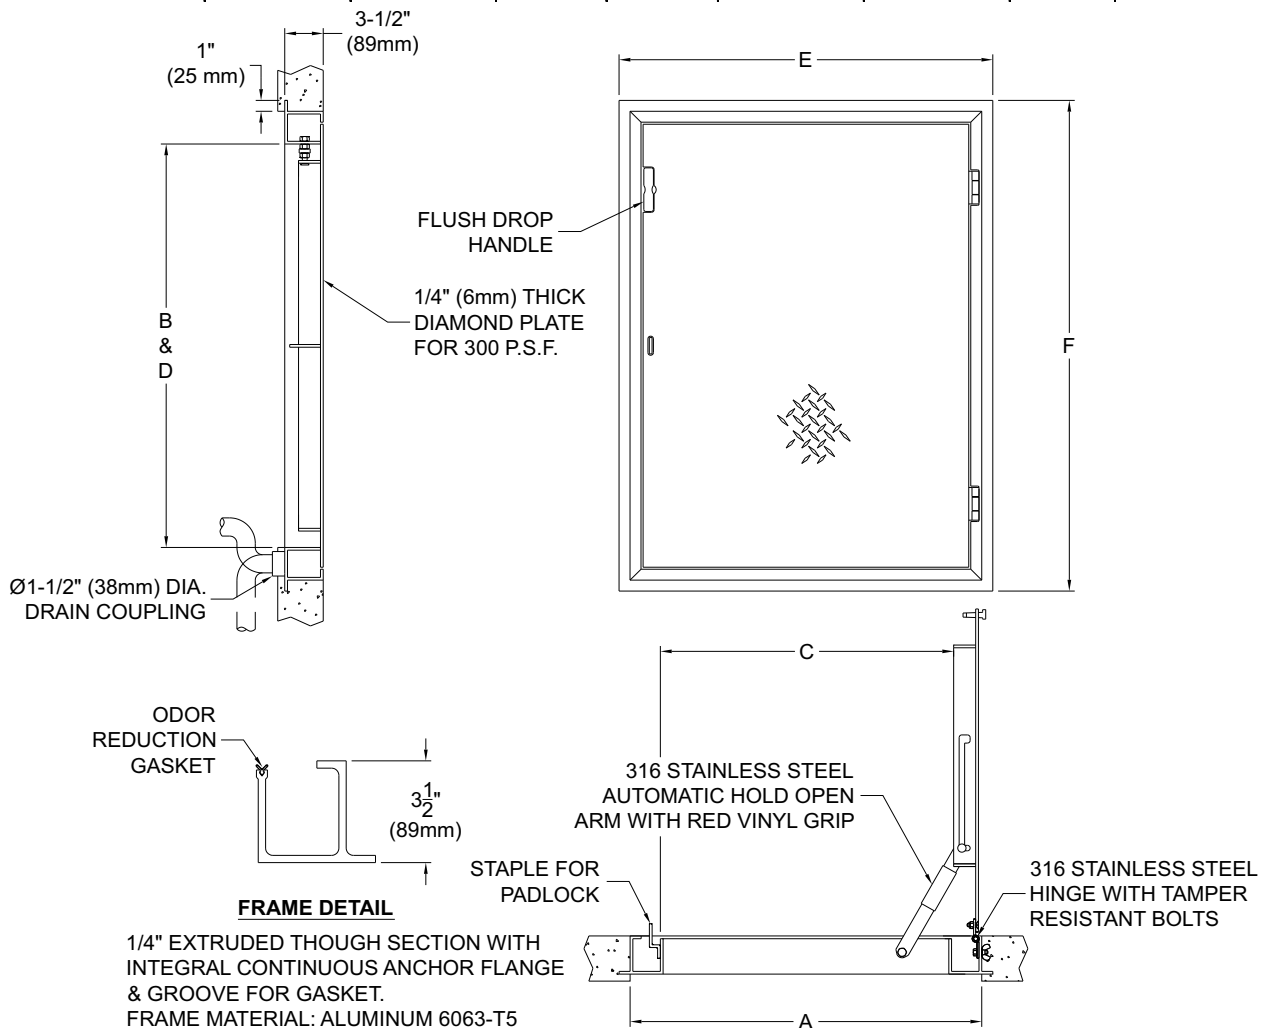

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.


SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE	FRAME OPENING		CLEAR OPENING		OVERALL SIZE		WEIGHT
in. (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	Lbs. (KG)
48" x 48" (1219 x 1219)	48" (1219)	48" (1219)	48" (1219)	45" (1143)	56" (1422)	56" (1422)	158 (72)
48" x 72" (1219 x 1829)	48" (1219)	72" (1829)	48" (1219)	70" (1778)	56" (1422)	80" (2032)	215 (98)
60" x 60" (1524 x 1524)	60" (1524)	60" (1524)	60" (1524)	58" (1473)	68" (1727)	68" (1727)	223 (101)

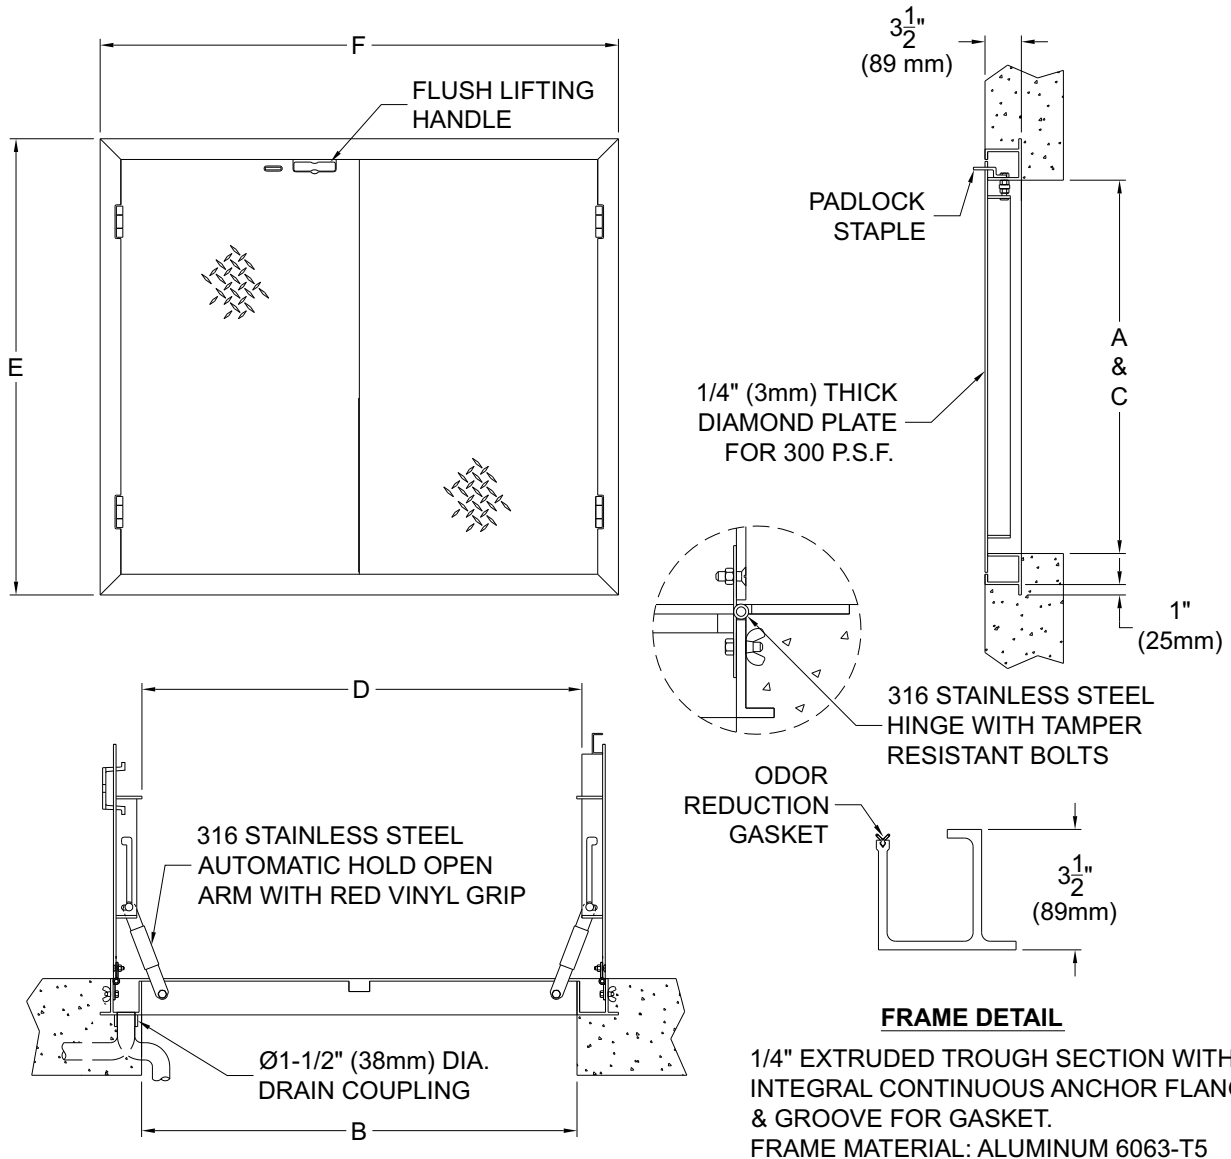

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____

Company _____ Date _____

Contact _____ Title _____

Approval for Manufacturing/Signature _____