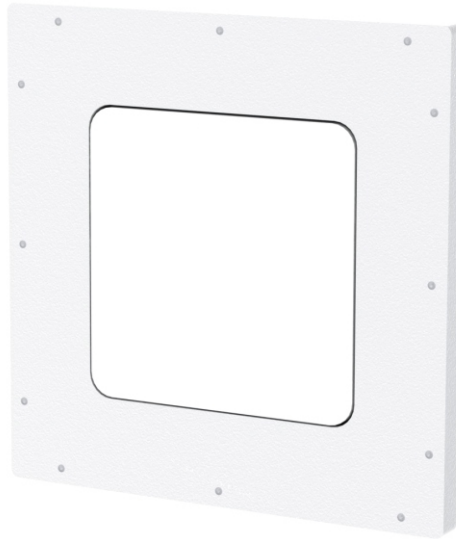


**GFG Series****Gypsum fiber Glass Access Doors**

**Doors** are designed to be architecturally pleasing with a design which allows the door and frame to blend seamlessly with the gypsum ceiling. With a tapered edge for joint tape, they are easily textured, light weight and will not crack or shrink.

**Door and Frame** are fabricated from glass reinforced gypsum.

**Flange** has depressions for screw placement and is tapered for joint compound application.

**Guide Specification**

Provide Elmdor GFG series gypsum fiber glass access door (specify model number). Access door and frame shall be fabricated from glass reinforced gypsum. Frame shall have pre-positioned depressions for screw placement and tapered for application of joint compound.



Member of U.S. Green  
Building Council

**GFG**

Revised: 7/26/13

Recyclable  
Product

**MODEL NUMBER AND OPTIONS SELECTION**
**Suffix Options**




"No Available Options"

**BASE MODEL NUMBER**
☐ GFG Gypsum Fiber Glass

**STANDARD AVAILABLE SIZES**

Special sizes available upon request.

NOMINAL DOOR SIZE (W X H)	ROUGH OPENING	WEIGHT
9" x 9"	15" x 15"	6 lbs.
12" x 12"	18" x 18"	9 lbs.
16" x 16"	22" x 22"	10 lbs.
18" x 18"	24" x 24"	11 lbs.
22" x 30"	28" x 36"	16 lbs.
24" x 24"	30" x 30"	16 lbs.
30" x 30"	36" x 36"	20 lbs.

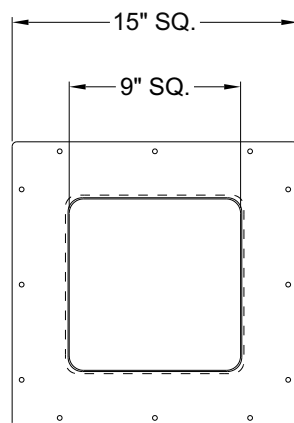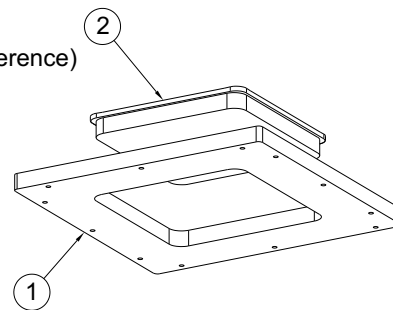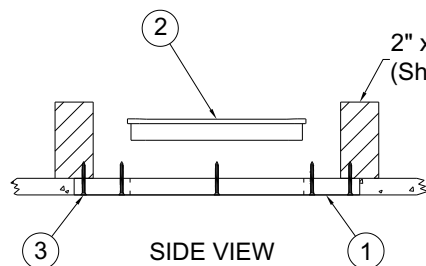

FRONT VIEW

**NOTES:**

1. Panel Frame
2. Door
3. Mounting Hardware  
(By Others)

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit [www.elmdorstoneman.com](http://www.elmdorstoneman.com) for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	

**GFG**

Revised: 7/26/13