

SLK Series**Shur-Lok Access Doors**

Doors are designed for drywall, masonry or concrete construction and provide the security required in today's schools, hospitals, hotels, and correctional institutions.

Door and Frame are fabricated from 14 gage, galvanized steel and the door is provided with a 16 gage vertical reinforcement channel.

Lock is an automatic springbolt type featuring a precision mechanism. When the door is closed in the locked position, the uniquely designed angled cam lock automatically engages. The key can only be removed when the lock is in the locked position.

Hinge is a concealed type. Doors 24" or larger are supplied with a continuous piano hinge.

Finish is a prime coat suitable for painting.

Guide Specification

Provide Elmdor® SLK Series, Shur-Lok Access Doors (specify model number and options). Access door and Frame shall be fabricated from 14 gage, galvanized steel with a prime coat finish. Door shall have a 16 gage vertical reinforcement channel, a concealed hinge, and an automatic locking, springbolt lock. Finish shall be a prime coat suitable for painting.



Member of U.S. Green
Building Council

SLK

Revised: 3/24/09

Recyclable
Product



MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

☐ SLK Shur-Lok Access Door

Suffix Options

☐ -AS

Automatic Spring Door Closer

☐ -SS

Stainless Steel Construction

(Type 304 number 4 Satin Finish)



STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE (W X H)	WALL OPENING (minimum required)	WEIGHT
SLK 8" x 8"	8-1/2" x 8-1/2"	4 lbs.
SLK 10" x 10"	10-1/2" x 10-1/2"	5.5 lbs.
SLK 12" x 12"	12-1/2" x 12-1/2"	7 lbs.
SLK 14" x 14"	14-1/2" x 14-1/2"	8 lbs.
SLK 16" x 16"	16-1/2" x 16-1/2"	10 lbs.
SLK 18" x 18"	18-1/2" x 18-1/2"	12 lbs.
SLK 18" x 24"	18-1/2" x 24-1/2"	16 lbs.
SLK 22" x 22"	22-1/2" x 22-1/2"	17.5 lbs.
SLK 24" x 24"	24-1/2" x 24-1/2"	20.5 lbs.
SLK 24" x 30"	24-1/2" x 30-1/2"	24 lbs.
SLK 24" x 36"	24-1/2" x 36-1/2"	28 lbs.
SLK 30" x 30"	30-1/2" x 30-1/2"	28.5 lbs.
SLK 36" x 36"	36-1/2" x 36-1/2"	41.5 lbs.

NOTES:

1. CONCEALED HINGE
2. DOOR
3. REINFORCEMENT CHANNEL
4. SPRING DOOR LOCK

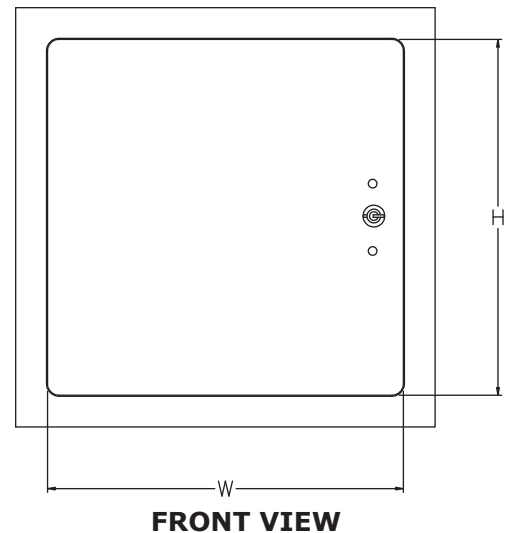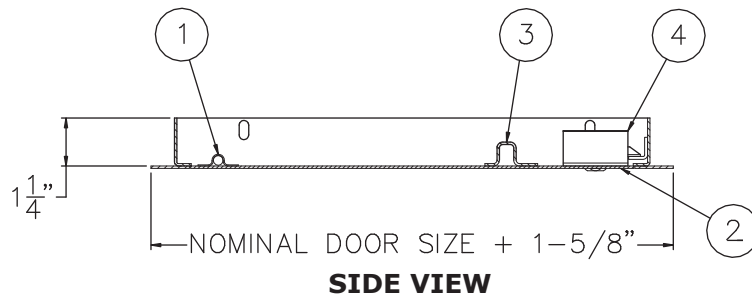

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
Company _____ Date _____
Contact _____ Title _____
Approval for Manufacturing/Signature _____

SLK

Revised: 3/24/09